




DON GRAY ELECTRICAL SUPPLIES
Electrical Wholesalers and Manufacturers Agents
312 PASCOE VALE RD, ESSENDON 3040
ph 9 326 2223 fax 9 326 2191
ABN 43 858 523 981

HEAT SHRINK TUBING

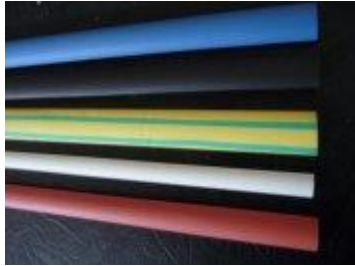

**IDEALLY USED FOR ELECTRICAL INSTALLATIONS,
TERMINATION, SPLICING AND BUNDLING OF
CABLES, CABLE PROTECTION AND
IDENTIFICATION, STRAIN RELIEF**

SHRINK TEMPERATURE: ABOVE 110deg C

RADIAL SHRINK RATIO >50%

LONGITUDINAL SHRINK RATIO <10%

**THICK WALL: SUITABLE FOR MAJOR CABLE
JOINTS**

**MEDIUM WALL: SUITABLE FOR WATERPROOF
CABLE JOINTS**

**THIN WALL: SUITABLE FOR INSULATION AND
COLOUR CODING**

- **LOW SHRINK TEMPERATURE**
- **FLAME RETARDANT**
- **FLEXIBLE**
- **UV RESISTANT**
- **RESIN LINED AVAILABLE IN MEDIUM & THICK
WALL FOR WATERPROOFING AND GREATER
MECHANICAL STRENGTH**



DON GRAY ELECTRICAL SUPPLIES
Electrical Wholesalers and Manufacturers Agents
312 PASCOE VALE RD, ESSENDON 3040
ph 9 326 2223 fax 9 326 2191
ABN 43 858 523 981

**AVAILABLE IN 1.2M LENGTHS, HANDY
MULTIPURPOSE KIT BOXES, PHASE
IDENTIFICATION KITS**

**Colours available: BLACK, BLUE, RED, WHITE,
GREEN/YELLOW, CLEAR**

THIN WALL PART NUMBER	PRE-SHRUNK DIAMETER	RECOVERED DIAMETER (AFTER HEATING)
3.2MM(COLOUR)HEATSHRINK	3.2mm	1.5mm
4.8MM(COLOUR)HEATSHRINK	4.8mm	2.5mm
6.4MM(COLOUR)HEATSHRINK	6.4mm	3.5mm
9.5MM(COLOUR)HEATSHRINK	9.5mm	5mm
12.7MM(COLOUR)HEATSHRINK	12.7mm	6.5mm
19.1MM(COLOUR)HEATSHRINK	19.1mm	9mm
25.4MM(COLOUR)HEATSHRINK	25.4mm	11mm
38.1MM(COLOUR)HEATSHRINK	38.1mm	20mm
50.1MM(COLOUR)HEATSHRINK	50.1mm	25mm

(other sizes are available – please contact us)